

Finish it fast. Finish it right.




S870 Tuff Edge Hem Tape

Our new single-sided S870 Tuff Edge Hem tape makes the banner fabrication process FASTER and EASIER. Tough, high tack single-sided tape reinforces edges, and eliminates the time-consuming folding and sewing process used in traditional edge finishing. Super-strong Tuff Edge Hem tape prevents tearing in extreme weather conditions, and can even eliminate the need for grommets.

Features

- Tuff Edge eliminates need for grommets, folding and sewing
- Finished banner edge is smooth with no rippled hem
- Resistant to UV and plasticizers
- Withstands temperature variations
- Water & moisture resistant
- Punch holes for no tear fastening

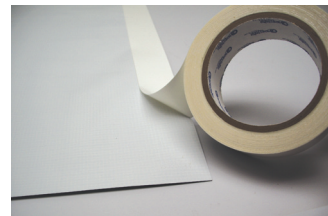

Now you can print, finish and deliver banners in a flash. S870's specially formatted, high-tack adhesive won't easily let go of the vinyl and that means the hems of your banners will remain strong. Tuff Edge comes in three standard widths and can be custom made to meet other specifications.



**SPECIALTY TAPES
MANUFACTURING**


www.specialtytapes.net
800.545.8273 262.835.0748
4221 Courtney Road - Franksville,
Wisconsin 53126

D/C D670 Tuff Tape III™

For premium finishing applications, our popular double-sided D670 Tuff Tape III™ is a perfect solution. It allows for more traditional fold over hem finishing, and often eliminates the need for sewing. With an aggressive adhesive highly resistant to water and moisture, D670 holds up in extreme cold, heat and humidity and is UV- and plasticizer-resistant.

Features

- Excellent adhesion to irregular surfaces.
- Resistant to UV and plasticizers
- Withstands temperature variations
- Water, moisture resistant

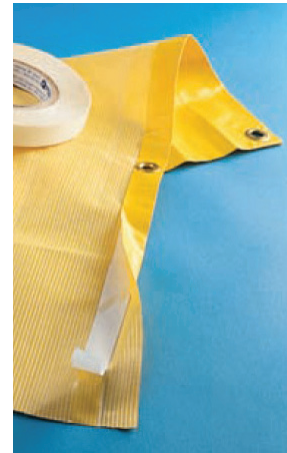

D670 Tuff Tape III™ Product Specifications

Carrier	1.2 mils Polypropylene	.031 mm
Adhesive	3.5 mils each side - acrylic	.089 mm
Liner	White Silicone Release Paper	
Adhesion to Stainless Steel	80 oz/in	22N/25 mm
Temperature Range	-40°F to 200°F	-40°F to 93°C
Color	Clear	
Total Tape Thickness	8.2 mils	.208 mm

S870 Product Specifications

Carrier	8 mils	.20 mm
Adhesive	3.5 mils	.089 mm
Adhesion to Stainless Steel	115 oz/in	31.4N/25 mm
Temperature Range	-40°F to 200°F	-40°F to 93°C
Color	White	
Total Tape Thickness	11.5 mils	.292 mm



**SPECIALTY TAPES
MANUFACTURING**

www.specialtytapes.net
800.545.8273 262.835.0748
4221 Courtney Road - Franksville,
Wisconsin 53126